

**FABIO
LEONARDI**
Innovation for tradition,
since 1917.



Bologna, 1917

AN ALL-ITALIAN ENTREPRENEURIAL STORY

Bologna, 1917. **Fabio Leonardi** founded, in Via del Porto – an area close to the city center – the manufacturing company that still bears his name today. The choice of location was not accidental; on the contrary, it was a highly strategic one. It allowed the machinery to be powered by the hydraulic energy of the Reno Canal, which at that time was still open and used for commercial navigation.

Here, **the world's first tomato crusher was born**, followed – in 1937 – by **the first meat grinder made in Italy**, thanks to the acquisition of an English patent. Since then, the company has never stopped growing, becoming one of the oldest businesses in Bologna and in Italy.

World War II became an opportunity to prove the founder's determination and perseverance. Despite the hardships and the extensive damage caused by bombings – which mainly targeted industrial areas – **the Leonardi family refused to give up. They decided to move their operations to Anzola dell'Emilia**, where the company's production, logistics, and headquarters are still based today.

Over the years, production has expanded and modernized, introducing **the first models equipped with electric motors**. For more than a century, the company's commitment to innovation has remained unchanged – a driving force constantly at work to meet the evolving needs of the market and to create **high-performance machines for both domestic and semi-professional use**.

In Leonardi machines, the most advanced technology meets the authentic taste of tradition.
And it has been that way for over 100 years.

INDEX


ELECTRIC MEAT GRINDERS AND TOMATO CRUSHERS

- NATURE LINE	05
- LACQUERED LINE	17
- INOX LINE	26

MANUAL TOMATO CRUSHERS 36

SAUSAGE STUFFERS 38

ELECTRIC MEAT GRINDERS AND TOMATO CRUSHERS

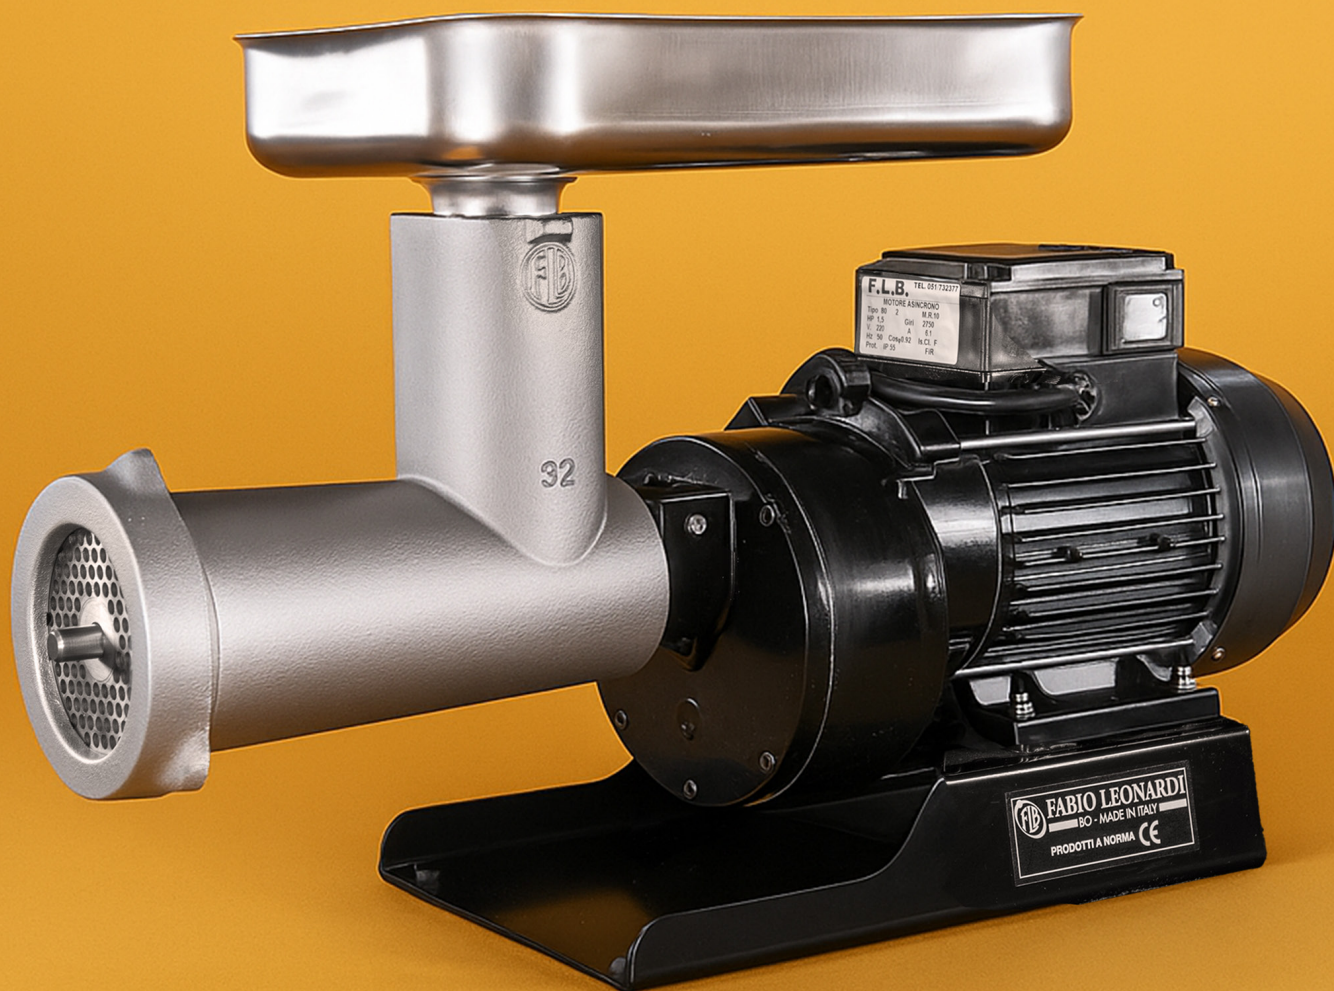

NATURE LINE

Designed for home use, the Natura line is equipped with naked motors that ensure faster cooling – a key advantage when processing meat and tomatoes in warm conditions.

TC5 – MR2 HP 0,30 NATURE



The meat grinder features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage funnel kit is available upon request.

Mounting plate: 6 mm.

Working capacity: 50–100 kg/h.

TECHNICAL FEATURES

MR2 BILLY HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0,30 W 190. Permanent grease lubrication.

ACCESSORIES

SP3 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

4,5 mm	8 mm	10 mm
12 mm	14 mm	16 mm

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)

TC8 – MRO HP 0,50 NATURE



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage filling kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 50-100 kg/h.

TECHNICAL FEATURES

MRO HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication.

ACCESSORIES

TC12 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	4,5 mm	8 mm
10 mm	12 mm	14 mm
16 mm		

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC12 – MRO HP 0,50 NATURE



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 100-150 kg/h.

TECHNICAL FEATURES

MRO HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication.

ACCESSORIES

TC8 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC22 – MR9 HP 1 NATURE



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 150-200 kg/h.

TECHNICAL FEATURES

MR9 HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication

ACCESSORIES

SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		


OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC32 – MR10 HP 1,50 NATURE

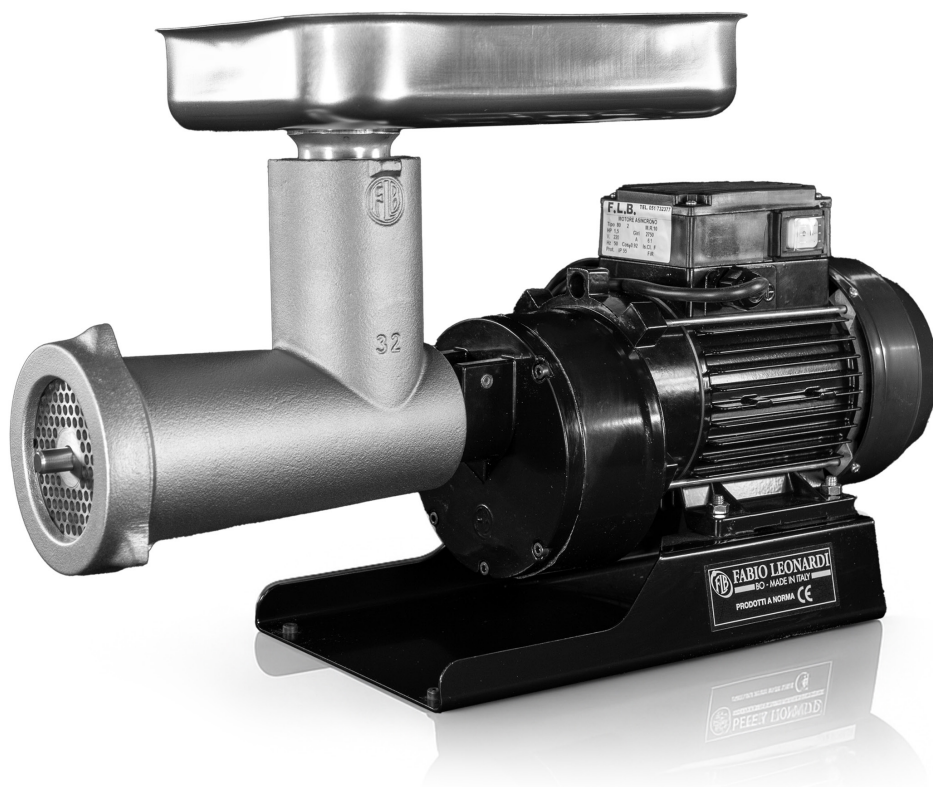

Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 200-300 kg/h.

TECHNICAL FEATURES

MR10 HP 1,50

Spheroidal cast iron main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1.5W 1000. Permanent grease lubrication.

ACCESSORIES

TC32 SHORT MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC32 CORTO – MR10 HP 1,50 NATURE



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 200-300 kg/h.

TECHNICAL FEATURES

MR10 HP 1,50

Spheroidal cast iron main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1.5W 1000. Permanent grease lubrication.

ACCESSORIES

TC32 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



SP2 – MR2 HP 0,30 NATURE



Tomato squeezer consisting of a body and screw made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. On request, a 18/10 stainless steel splash guard can be fitted to the chute. **Perfect for small batches.**

TECHNICAL FEATURES MR2 BILLY HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0,30 W 190. Permanent grease lubrication.

ACCESSORIES

TC 5 MEAT GRINDER



SPLASH GUARD FOR SP2 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP3 – MRO HP 0,50 NATURE



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 250-300 kg/h.

TECHNICAL FEATURES

MRO HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication.

ACCESSORIES

SP5 TOMATO CRUSHER



TC8 MEAT GRINDER



TC12 MEAT GRINDER



SPLASH GUARD FOR SP3 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 – MRO HP 0,50 NATURE



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 300-400 kg/h.

TECHNICAL FEATURES

MRO HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication.

ACCESSORIES

SP3 TOMATO CRUSHER




TC8 MEAT GRINDER



TC12 MEAT GRINDER



SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 – MR9 HP 1 NATURE



Tomato squeezer consisting of a body, screw, and ring made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be fitted to the chute. **Indicative working capacity: 300-400 kg/h.**

TECHNICAL FEATURES MR9 HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication.

ACCESSORIES


SP3 TOMATO CRUSHER



TC22 MEAT GRINDER



SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 – MR10 HP 1,50 NATURE



Tomato squeezer consisting of a body, screw, and ring made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, an 18/10 stainless steel splash guard can be fitted to the chute. **Indicative working capacity: 300-400 kg/h.**

TECHNICAL FEATURES MR10 HP 1,50

Spheroidal cast iron main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1.5W 1000. Permanent grease lubrication.

ACCESSORIES


SP3 TOMATO CRUSHER



TC22 MEAT GRINDER



SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



ELECTRIC MEAT GRINDERS AND TOMATO CRUSHERS



LACQUERED LINE

Designed for home use, the Lacquered line is equipped with fully enclosed motors and painted steel housings, offering easier maintenance and enhanced gear protection.

TC5 – MR2 HP 0,30 LACQUERED



The meat grinder features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage funnel kit is available upon request.

Mounting plate: 6 mm.

Working capacity: 50–100 kg/h.

TECHNICAL FEATURES

MR2 LACQUERED HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.30 W 190. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

SP2 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

4,5 mm	8 mm	10 mm
12 mm	14 mm	16 mm

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)

CERTIFIED
PRODUCT



TC8 – MR8 HP 0,50 LACQUERED



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage filling kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 50-100 kg/h.

TECHNICAL FEATURES

MR8 LACQUERED HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

TC12 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

4,5 mm	8 mm	10 mm
12 mm	14 mm	16 mm

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC12 – MR8 HP 0,50 LACQUERED



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage filling kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 100-150 kg/h.

TECHNICAL FEATURES

MR8 LACQUERED HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

TC8 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		


OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC22 – MR7 HP 1 LACQUERED

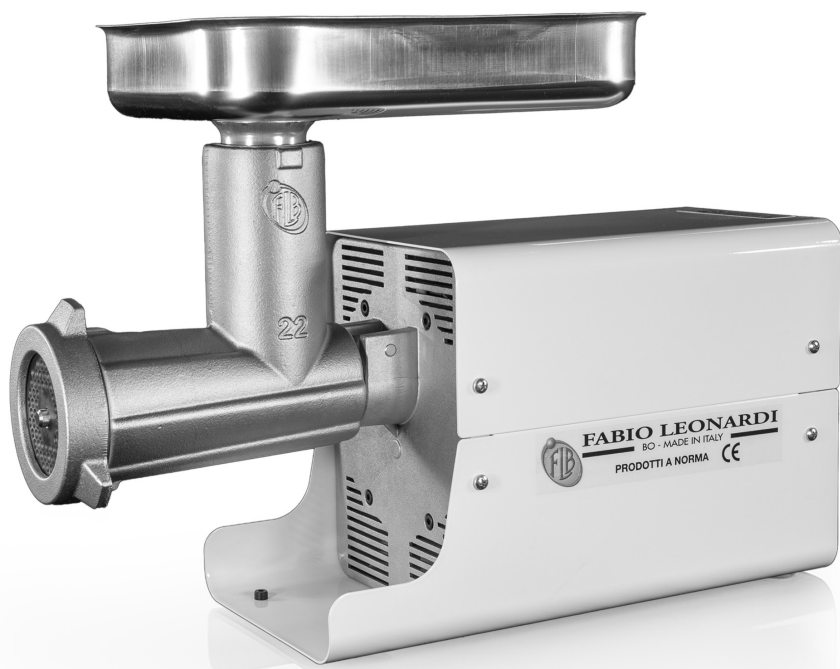

Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 150-200 kg/h.

TECHNICAL FEATURES MR7 LACQUERED HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



SP2 - HP 0,30 LACQUERED



Tomato squeezer consisting of a body and screw made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, an 18/10 stainless steel splash guard can be fitted to the chute. **Perfect for small batches.**

TECHNICAL FEATURES

MR2 LACQUERED HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.30 W 190. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

TC 5 MEAT GRINDER



SPLASH GUARD FOR SP2 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP3 - MR8 HP 0,50 LACQUERED



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 250-300 kg/h.

TECHNICAL FEATURES

MR8 LACQUERED HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

SP5 TOMATO CRUSHER



TC8 MEAT GRINDER



TC12 MEAT GRINDER



SPLASH GUARD FOR SP3 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 - MR8 HP 0,50 LACQUERED



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 300-400 kg/h.

TECHNICAL FEATURES MR8 LACQUERED HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Painted steel cover.

ACCESSORIES

SP3 TOMATO CRUSHER




TC8 MEAT GRINDER



TC12 MEAT GRINDER




SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 - MR7 HP 1 LACQUERED

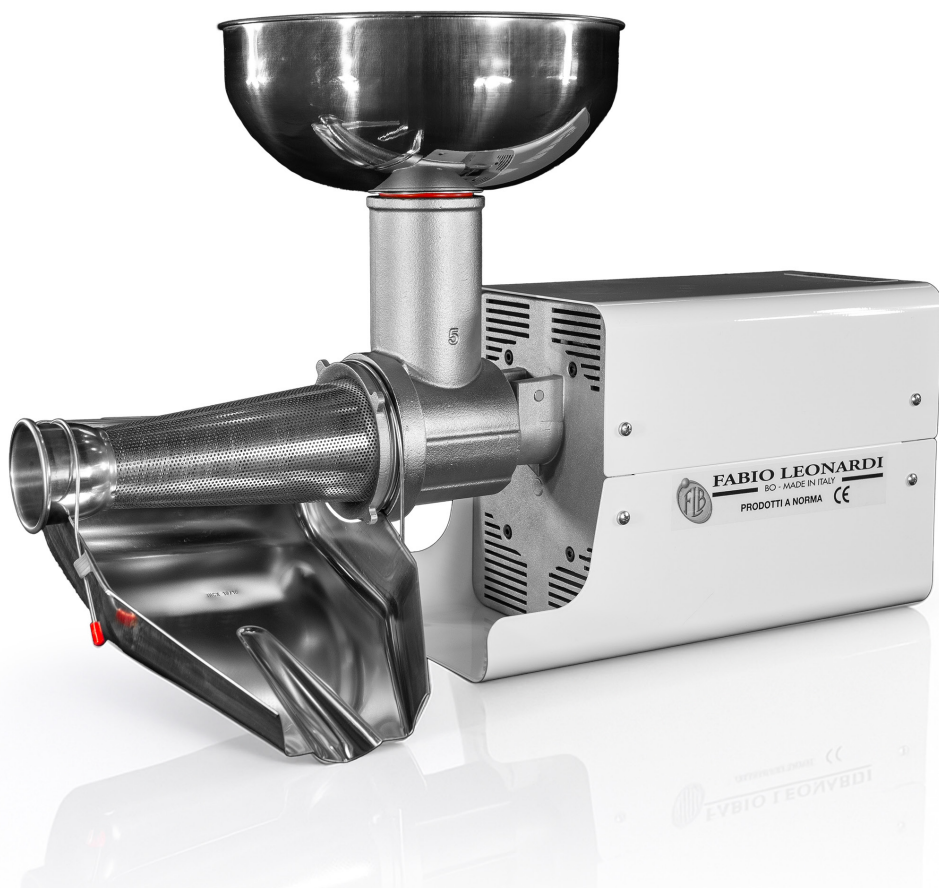

Tomato squeezer consisting of a body and screw made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, an 18/10 stainless steel splash guard can be fitted to the chute. Indicative working capacity: 300-400 kg/h.

TECHNICAL FEATURES MR7 LACQUERED HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication. Painted steel cover.

ACCESSORIES


SP3 TOMATO CRUSHER



TC22 MEAT GRINDER




SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



ELECTRIC MEAT GRINDERS AND TOMATO CRUSHERS

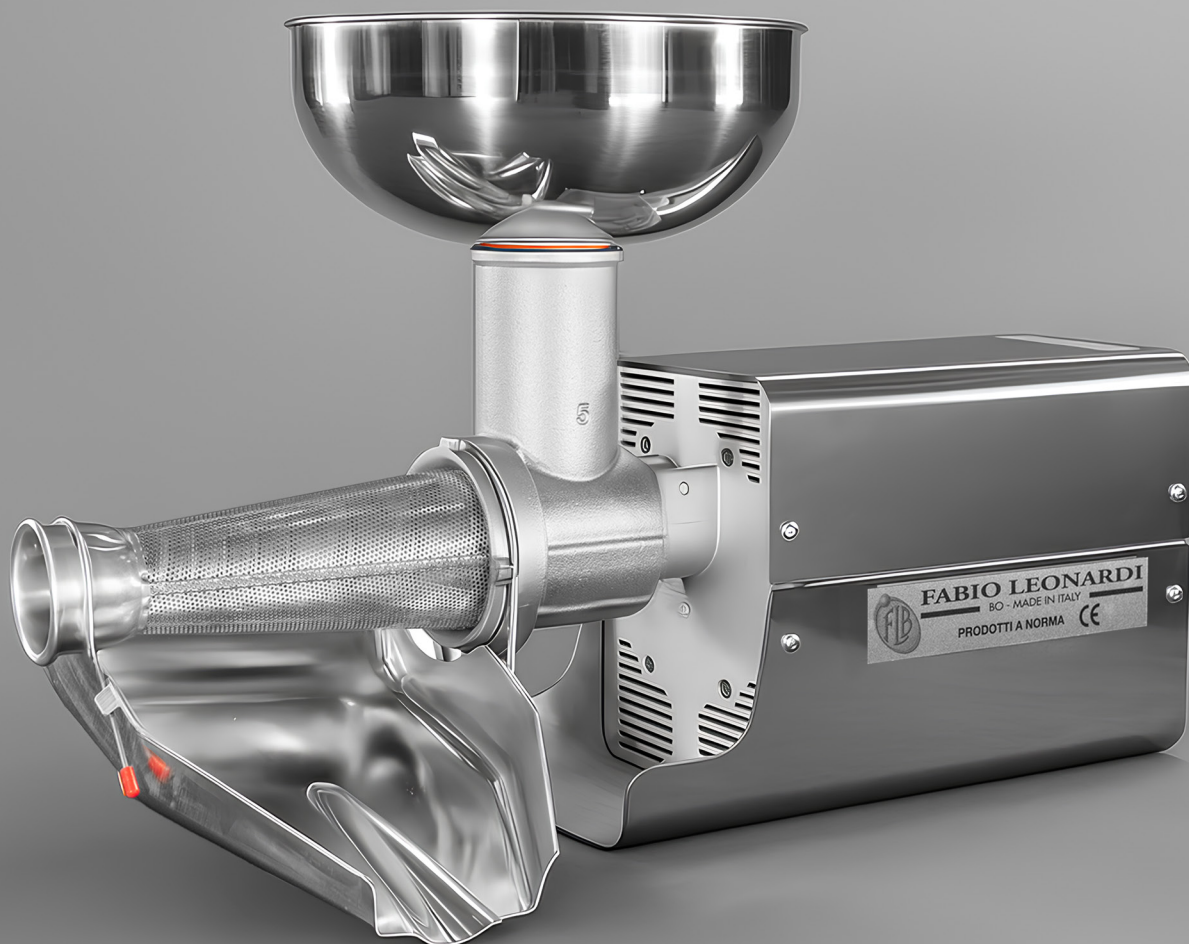

INOX LINE

Dedicated to professional environments, the Inox line is equipped with a stainless steel body for faster cleaning and enhanced motor protection – ideal for small workshops and artisan producers.

TC5 – MR2 HP 0,30 INOX



The meat grinder features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage funnel kit is available upon request.

Mounting plate: 6 mm.

Working capacity: 50-100 kg/h.

TECHNICAL FEATURES MR2 INOX HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.30 W 190. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

SP2 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

4,5 mm	8 mm	10 mm
12 mm	14 mm	16 mm

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)

CERTIFIED
PRODUCT



TC8 – MR8 HP 0,50 INOX



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 50-100 kg/h.

TECHNICAL FEATURES MR8 INOX HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

TC12 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	4,5 mm	8 mm
10 mm	12 mm	14 mm
16 mm		

OTHER ACCESSORIES

- 3-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC12 – MR8 HP 0,50 INOX



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 100-150 kg/h.

TECHNICAL FEATURES MR8 INOX HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

TC8 MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		


OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC22 – MR7 HP 1 INOX

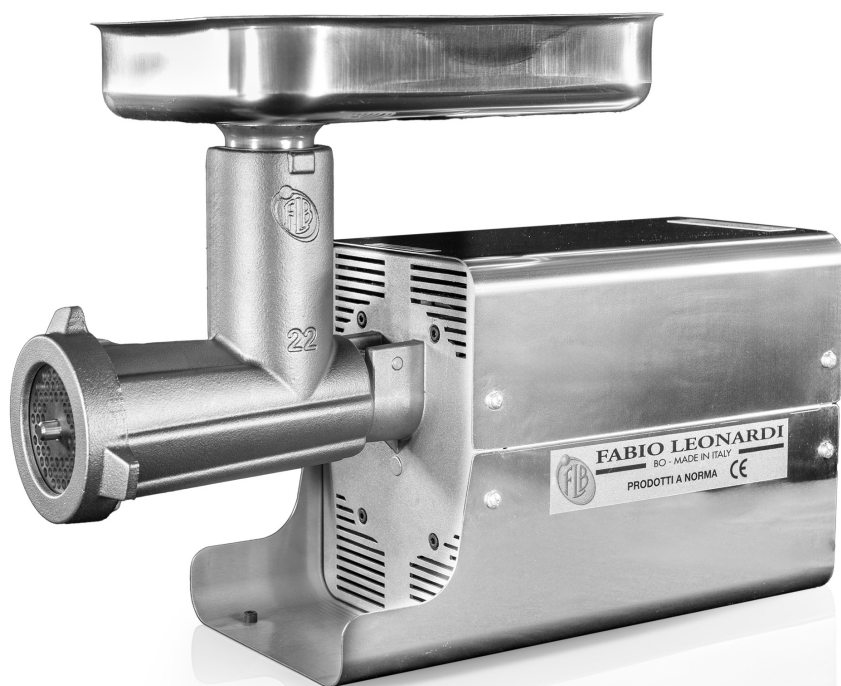

Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 150-200 kg/h.

TECHNICAL FEATURES MR7 INOX HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



TC32 – MR6 HP 1,50 INOX



Meat grinder consisting of a body, screw, and ring made of cast iron with certified food-grade Niploy treatment. The funnel, perforated plate, and knife are made of 18/10 stainless steel. A sausage stuffing kit with stabilizer and funnels is available on request.

Mounting plate: 6 mm.

Working capacity: 200-300 kg/h.

TECHNICAL FEATURES

MR6 INOX HP 1,50

Spheroidal cast iron main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1.5 W 1000. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

TC32 SHORT MEAT GRINDER



SP3 TOMATO CRUSHER



SP5 TOMATO CRUSHER



AVAILABLE PLATES

Hole Diameters

3 mm	3,5 mm	4,5 mm
8 mm	10 mm	12 mm
14 mm	16 mm	18 mm
20 mm		

OTHER ACCESSORIES

- 4-Piece Plastic Sausage Funnel Kit (15 mm + 20 mm + 25 mm + 30 mm)
- Stabilizer

CERTIFIED
PRODUCT



SP2 – MR2 HP 0,30 INOX



ACCESSORIES

TC 5 MEAT GRINDER



SPLASH GUARD FOR SP2 TOMATO CRUSHER



The tomato squeezer features a cast-iron body and screw with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. An 18/10 stainless steel splash guard can be mounted on the chute upon request.
Perfect for small batches.

TECHNICAL FEATURES MR2 INOX HP 0,30

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.30 W 190. Permanent grease lubrication. Stainless steel cover.

CERTIFIED
PRODUCT



SP3 – MR8 HP 0,50 INOX



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 250-300 kg/h.

TECHNICAL FEATURES MR8 INOX HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

SP5 TOMATO CRUSHER



TC8 MEAT GRINDER



TC12 MEAT GRINDER



SPLASH GUARD FOR SP3 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 – MR8 HP 0,50 INOX



The tomato squeezer features a cast-iron body, screw, and ring with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, a 18/10 stainless steel splash guard can be mounted on the chute.

Indicative working capacity: 300-400 kg/h.

TECHNICAL FEATURES MR8 INOX HP 0,50

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 0.50. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES

SP3 TOMATO CRUSHER




TC8 MEAT GRINDER



TC12 MEAT GRINDER



SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



SP5 – MR7 HP 1 INOX



Tomato squeezer consisting of a body, screw, and ring made of certified cast iron with certified food-grade Niploy treatment. The funnel, filter, and chute are made of 18/10 stainless steel. Upon request, an 18/10 stainless steel splash guard can be fitted to the chute. **Indicative working capacity: 300-400 kg/h.**

TECHNICAL FEATURES MR7 INOX HP 1

Steel main gear, asynchronous motor. Voltage available: 110/220/230/240, 50 o 60 Hz. Available 2 or 4 poles. Output revolution 110 rpm for the 2 poles, 55 rpm for the 4 poles. Power HP 1 W 750. Permanent grease lubrication. Stainless steel cover.

ACCESSORIES


SP3 TOMATO CRUSHER



TC22 MEAT GRINDER



SPLASH GUARD FOR SP5 TOMATO CRUSHER



CERTIFIED
PRODUCT



MANUAL TOMATO CRUSHERS



Traditional machines by definition. The manual tomato squeezers are designed for producing small quantities — just like it was done in the past.

MANUAL TOMATO CRUSHERS

Manual tomato squeezers enhance the true Italian gastronomic tradition, while maintaining a modern design and advanced technical finishes. Ideal for small and medium quantities.

SP2 - SPEEDY

The newest member of the Leonardi range, the SP2 Speedy tomato squeezer, is distinguished by its body and funnel made from a single block of food-grade plastic. It comes with a cast-iron screw with certified Niploy treatment, a filter and ring in 18/10 stainless steel, and a chute made of food-grade plastic.



SP3 NIPLOY

The body, screw, and ring are made of cast iron with certified Niploy treatment. The funnel, filter, and tomato chute are made of 18/10 stainless steel.



SP5 NIPLOY

The body, screw, and ring are made of cast iron with certified Niploy treatment. The funnel, filter, and tomato chute are made of 18/10 stainless steel.



SP6 NIPLOY

The body, screw, and ring are made of cast iron with certified Niploy treatment. The funnel, filter, and tomato chute are made of 18/10 stainless steel.



SAUSAGE STUFFERS



Ideal for all types of sausages, they are made entirely of stainless steel, ensuring a lifetime of durability.

SAUSAGE STUFFERS

Available in 3 versions: 5, 7.5, and 10 kg. All three are made of stainless steel and feature an aluminum gear box, polycarbonate bushings, and galvanized steel gears.

Each model is equipped with a slow forward drive (for operation) and a fast reverse drive. The piston is made of nylon with a rubber gasket and air release valve, and the cylinder locks automatically.

The machine can be secured to a workbench using the two supplied clamps, which fit into the side slots. The cylinder, piston, and rack are removable for thorough cleaning.

SAUSAGE STUFFER KG 5



SAUSAGE STUFFER KG 7,5



SAUSAGE STUFFER KG 10



NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



Fabio Leonardi srl
Via Baiesi 132/b 40011
Anzola dell'Emilia (Bologna)
P.IVA 02703071205

Tel: +39 051 73 23 77
E-mail: info@fabioleonardi.it

www.fabioleonardi.it